

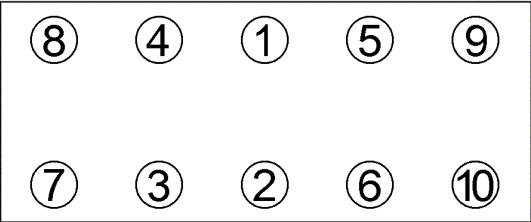


<b>Anziehvorschrift für Zylinderkopf</b>		<b>073.942</b> passend für / suitable for adaptable à / adaptable a <b>Renault, Nissan, Opel</b>	 Das Original	
<b>Tightening Instructions for Cylinder Head</b>				
<b>Instructions de serrage pour culasse</b>				
<b>Prescripciones de apriete para culatas</b>				
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
 258.180 M 12x1,5x117,5				
Anziehen/ * 30 Nm Tightening/ 30 Nm Serrage/ ➤ 180 ° +/-25° Apriete				
Zeichenerklärung / Explanations / Explication / Explicacion				
* ➤	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
<b>Motortyp / Engine type / Type de moteur / Tipo de motor</b> ⚙ 0,7 mm, Ø 83,8 mm  Mot.: F4P/F4R 1,8 ltr./2,0 ltr. 16 V  Avantime, Clio, Espace, Laguna, Megane, Scenic, Trafic, vel Satis, Nissan Primastar, Opel Vivaro				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		<b>*073.942*</b>		